

# External Brand Guidelines

2025

nine.energy



LOGO

# **Primary Logo**

The primary logo is the preferred logo for all applications and usage.




**Light Background** 



Dark Background

### **Brand Mark**

The brand mark should only be used when the primary logo text is illegible due to size. This mark is also used in the brand as a design element (ie: a watermark).

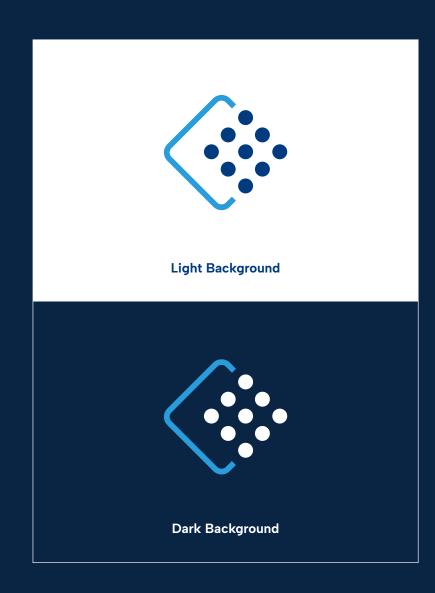

### Other Logo Types

Other types of logos are available in specific use cases.

The stacked logo can be used when horizontal space is not adequate and would cause the legibility issues. The stacked logo is best used in vertical compositions.



**Light Background** 



**Dark Background** 

# **Logo Construction**

The NineDot Energy logo is made up of two elements, the brand logo mark and the wordmark.

The brand logo mark is the logo icon to the left of the name.

The wordmark is the text 'ninedot energy'.



# **Logo Clear Space**

When determining how much space should be used between the NineDot Energy logo and another design element or logo, the space between can be measured with the brand logo mark.



# Logo Size

The NineDot Energy logo should not be sized smaller then 1.5" on any print or digital designs.

If the logo needs to appear in a smaller application, then the brand logo mark may be utilized.



# Correct Logo Applications

### **Primary Use**



### **Secondary Use**



**Photo with Dark Overlay** 



**Alternative Use** 



**Alternative Use** 



**Photo with Dark Overlay in Corner** 



**Black Printing** 



**Alternative Use** 



# Incorrect Logo Applications

### **Unbranded Color Background**



**Background with Insufficient Contrast** 



**Photo with No Overlay** 



**Changing Color Palette** 



**Distorting Logo/Changing Elements** 



**Unbranded Gradient Overlay** 



**Outlining the Logo** 



**Boxing in the Logo** 



## Primary Color Palette

The primary colors are the only colors that should be used throughout the NineDot Energy brand with the exception of the secondary colors used for charts and graphs detailed on the following page.

The dark navy should be used as the primary background color as it's the darkest color creating the highest contrast between the additional primary colors. The blue ribbon color should be used as a secondary background color. The navy should be used for all headlines and the gray for all body text. The magenta is the primary button color and can be used as a design accent color. The accent gray should be used as a subtle background color that divides sections of copy.

No other solid colors should be used in any NineDot Energy designs.

### **Primary Colors**

### Dark Navy

HEX #002444
RGB 0, 36, 68
CMYK 100, 85, 44, 48
PMS 289 C

#013B7F RGB 1,59,127 CMYK 100,87,23,8 PMS 287 C

### Magenta

**Blue Ribbon** 

**CMYK** 73, 26, 0, 0

279 C

HEX

**RGB** 

PMS

#289BDB

40, 155, 219

 HEX
 #A52672

 RGB
 165, 38, 114

 CMYK
 37, 98, 26, 3

 PMS
 675 C

### Gray

Navy

HEX#444B49RGB68,75,73CMYK69,56,59,39PMS446 C

#### Accent

 HEX
 #F5F5F4

 RGB
 245, 245, 244

 CMYK
 3, 2, 2, 0

 PMS
 663 C



# **Brand Guidelines**

2025